



# Address challenges constraining 5G mmWave with our 24 GHz Beamforming front end IC



Operating from 24.25 to 27.5 GHz, the SUMMIT2427e™ integrates power amplifiers (PA), low noise amplifiers, T/R switching, beamformers with beam table memory, calibration, gain control and temperature and power telemetry with a high-speed system peripheral interface (SPI) for control. A single SUMMIT2427e™ provides two sets of four channels for two antenna polarizations – a total of eight channels per RFIC.

## KEY FEATURES

- 24.25 GHz-27.5 GHz
- Beamforming transceiver with 8 (2x4 H+V) ports enabling two data streams supporting 2 MIMO layers
- Tx/Rx independent beam directions enabled by 6-bit phase shifting and 16 dB variable gain in each path
- High-power, high-efficiency SOI CMOS power amplifiers
- Integrated low-loss T/R switches, linear power and state-of-the-art low noise amplifiers
- Ultra-low Transmit- and Receive-Mode power consumption
- 6-bit full-360° phase shifting and 0.5dB-step 16dB-range variable gain in each path
- Fully calibrated for Gain/Phase matching across ICs
- Extensive on-chip temperature and power sensing
- On-chip gain control for temperature compensation
- High-Speed SPI with large on-chip beam table storage
- Wafer-Level Chip-Scale Package (WLCSP) compatible with low-cost PCB manufacturing
- Support for large-scale arrays through multiple chip-addressing modes

**“Sivers Semiconductors is indeed offering a real performance breakthrough which will translate to higher performance and lower cost mmWave phased array systems.”**

*Daniel Kang,  
Head of Digital Solution Team, Dreamtech*

Sivers Semiconductor products and services enable 5G manufacturers to simplify product design, integrate components to reduce footprint and improve system reliability. Of course, with best-in-class RF performance.

SUMMIT2427e™ is an eight-channel RF front-end for 28 GHz, 5G phased array antenna system fabricated in RF-Silicon on Insulator (RF-SOI). SUMMIT2427e™ is designed to address the challenges constraining 5G mmWave performance by:

- Extending the link range to decrease infrastructure costs and improve customer satisfaction.
- Reducing power consumption and thermal dissipation.
- Reducing antenna array complexity and overall RF front-end cost.



5G MMWAVE



FWA



SATELLITE

High power and efficiency will be success factors when designing larger Base Transceiver Station (BTS) antenna arrays, where thermal design is critical. SUMMIT2427e™ is a greener and more compelling solution reaching more customers, still using less energy.

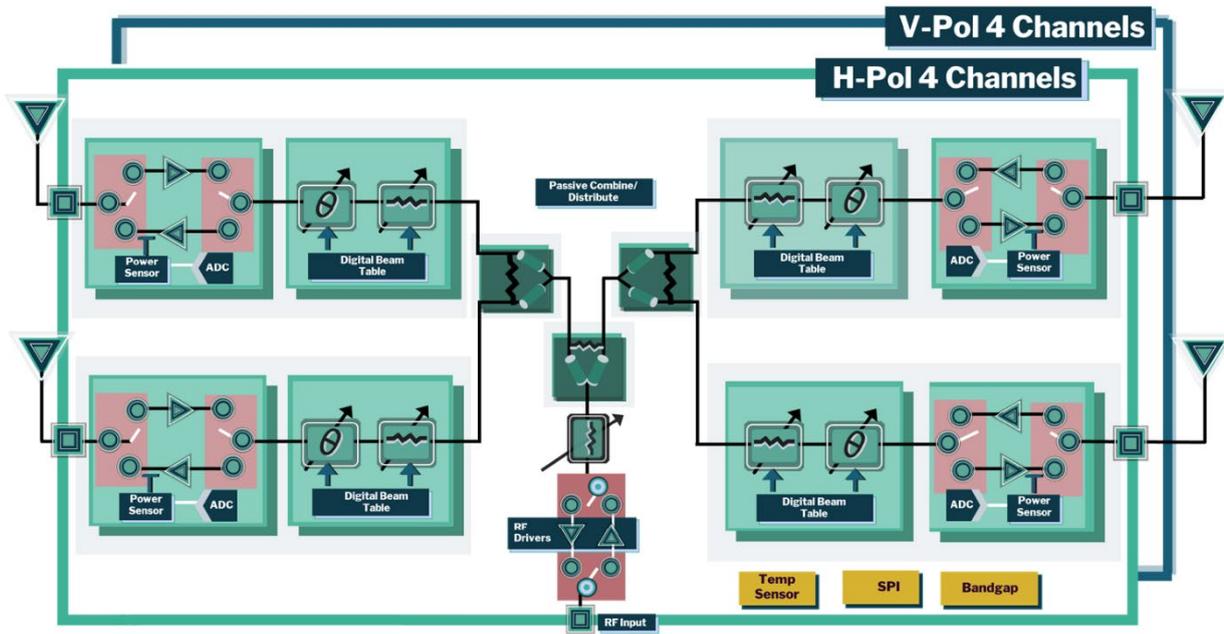


Figure 1. Block schematics SUMMIT2427e™

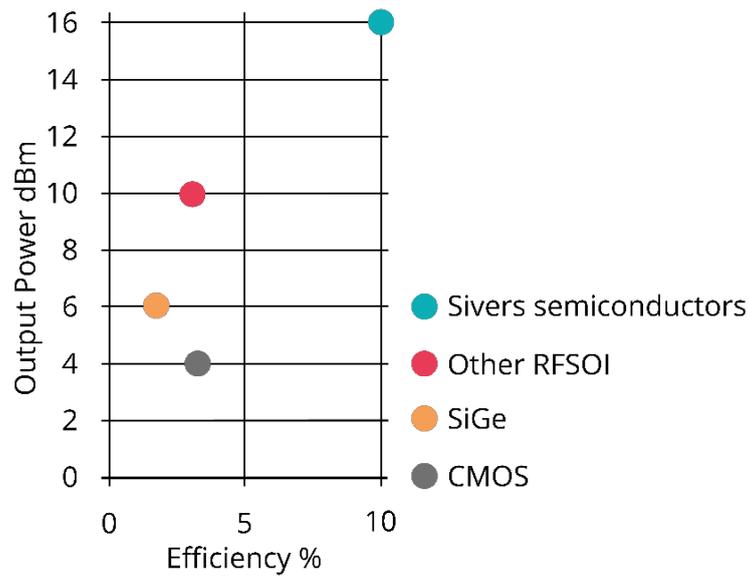


Figure 2. The SUMMIT2427e™ offers 3-5 times better efficiency and 6-12 dB (based on available information) more output power than competitors

For more information, please contact: [sales@sivers-wireless.com](mailto:sales@sivers-wireless.com)

Sivers Semiconductors AB (STO: SIVE) is a leader in SATCOM, 5G, 6G, Photonics, and Silicon Photonics that drives innovation in global communications and sensor technology. Our business units, Photonics and Wireless, supply cutting-edge, integrated chips and modules critical for high-performance gigabit wireless and optical networks. Catering to a broad spectrum of industries from telecommunication to aerospace, we fulfill the increasing demand for computational speed and AI application performance, replacing electric with optical connections for a more sustainable world. Our wireless solutions are forging paths in advanced SATCOM/5G/6G systems, while our photonics expertise is revolutionizing custom semiconductor photonic devices for optical networks and optical sensing, making us a trusted partner to Fortune 100 companies as well as emerging unicorns. With innovation at our core, Sivers Semiconductors is committed to delivering bespoke, high-performance solutions for a better-connected and safer world. Discover our passion for perfection at [www.sivers-semiconductors.com](http://www.sivers-semiconductors.com).